


AUDIO LINE Surge Protection Speakers and Audio Equipment

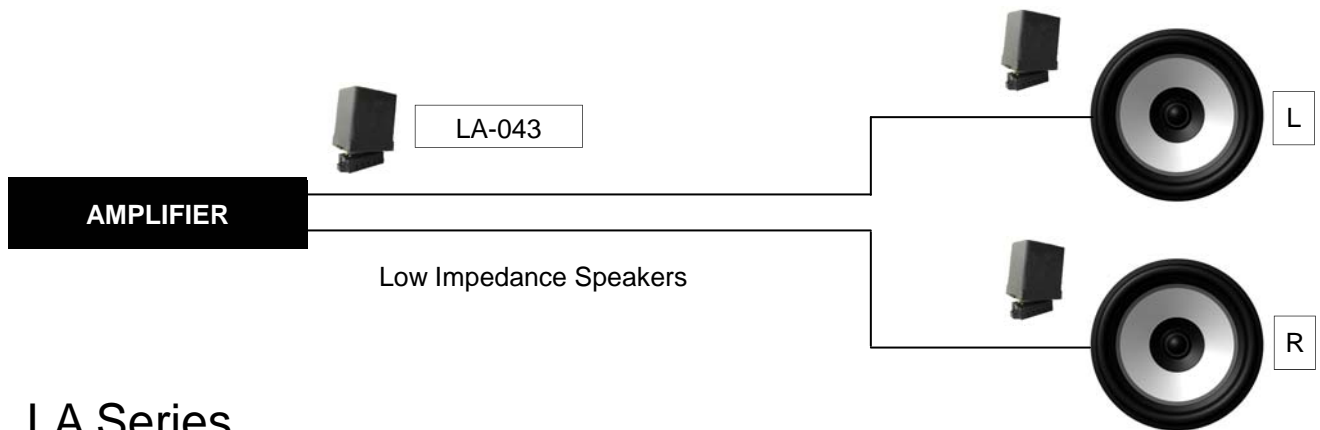

LA Series

Equipment installed outdoors are effective antennae for power impulses created by lightning. Speakers mounted in stadiums, on light poles, on tops of buildings or on the ground are great examples. Amplifiers and other audio source equipment in the energy surge's path to ground often suffer the greatest damage in such events. Even lightning striking near an audio installation can induce high current into speaker leads and cause catastrophic damage. Protecting that equipment is simple and inexpensive with LA Series surge protectors from Juice Goose.

LA Series models are designed to protect two pairs of speaker leads (four wires). The mounting base (Item PCB-1B, sold separately) also has a connection for a ground wire. The unit is rated for operating currents up to ten amps which may be divided into two wire pairs at five amps each or bridged for a single pair at ten amps. The LA Series includes models designed for various peak voltages from under 15 to 100. (See the LA Selection Chart for additional information.)

The LA Series is designed with three stage component protection - varistors (MOV), wire wound inductors and silicone avalanche diodes (SAD) - to provide sub nanosecond response to surges up to 5,000 amps. This design is tuned to have ultra low impedance of only 0.02 ohms per wire pair.



LA 100
with PCB1B
Base

For additional information:
713-772-1404
info@juicegoose.com
www.juicegoose.com

| Wattage | Voltage (RMS) | Voltage (Peak) | Amperage | LA Model |
|---------|---------------|----------------|----------|----------|
|---------|---------------|----------------|----------|----------|

4 Ohm

| | | | | |
|-----|------|------|-------|-----|
| 10 | 6.3 | 8.9 | 1.6 | 015 |
| 20 | 8.9 | 12.6 | 2.2 | 015 |
| 40 | 12.6 | 17.9 | 3.2 | 020 |
| 50 | 14.1 | 20.0 | 3.5 | 030 |
| 75 | 17.3 | 24.5 | 4.3 | 030 |
| 100 | 20.0 | 28.3 | 5.0 * | 030 |
| 150 | 24.5 | 34.6 | 6.1 * | 043 |
| 200 | 28.3 | 40.0 | 7.1 * | 043 |
| 300 | 34.6 | 48.9 | 8.7 * | 060 |

8 Ohm

| | | | | |
|-----|------|------|-------|-----|
| 10 | 8.9 | 12.6 | 1.1 | 015 |
| 20 | 12.6 | 17.9 | 1.6 | 020 |
| 40 | 17.9 | 25.3 | 2.2 | 030 |
| 50 | 20.0 | 28.3 | 2.5 | 030 |
| 75 | 24.5 | 34.6 | 3.1 | 043 |
| 100 | 28.3 | 40.0 | 3.5 | 043 |
| 150 | 34.6 | 49.0 | 4.3 | 060 |
| 200 | 40.0 | 56.6 | 5.0 * | 060 |
| 300 | 49.0 | 69.3 | 6.1 * | 100 |
| 400 | 56.6 | 80.0 | 7.1 * | 100 |
| 500 | 63.2 | 89.4 | 7.9 * | 100 |
| 600 | 69.3 | 98.0 | 8.7 * | 100 |

* Requires Bridging for higher current loads.

The LA surge protector is designed for two pairs of speaker leads plus a connection to ground. The device is rated for a maximum current load of 10 amps which may be divided into two 5 amp pairs or one 10 amp pair of leads. See instructions for bridging connections.

| Wattage | Voltage (RMS) | Voltage (Peak) | Amperage | LA Model |
|---------|---------------|----------------|----------|----------|
|---------|---------------|----------------|----------|----------|

16 Ohm

| | | | | |
|-----|------|------|-----|-----|
| 10 | 12.6 | 17.9 | 0.8 | 020 |
| 20 | 17.9 | 25.3 | 1.1 | 030 |
| 40 | 25.3 | 35.8 | 1.6 | 043 |
| 50 | 28.3 | 40.0 | 1.8 | 043 |
| 75 | 34.6 | 49.0 | 2.2 | 060 |
| 100 | 40.0 | 56.6 | 2.5 | 060 |
| 150 | 49.0 | 69.3 | 3.1 | 100 |
| 200 | 56.6 | 80.0 | 3.5 | 100 |
| 300 | 69.3 | 98.0 | 4.3 | 100 |

70 Volt

| | | | | |
|-----|------|-------|-------|-----|
| 10 | 70.0 | 100.0 | 0.1 | 100 |
| 20 | 70.0 | 100.0 | 0.3 | 100 |
| 40 | 70.0 | 100.0 | 0.6 | 100 |
| 50 | 70.0 | 100.0 | 0.7 | 100 |
| 75 | 70.0 | 100.0 | 1.1 | 100 |
| 100 | 70.0 | 100.0 | 1.4 | 100 |
| 150 | 70.0 | 100.0 | 2.1 | 100 |
| 200 | 70.0 | 100.0 | 2.8 | 100 |
| 300 | 70.0 | 100.0 | 4.3 | 100 |
| 400 | 70.0 | 100.0 | 5.7 * | 100 |
| 500 | 70.0 | 100.0 | 7.1 * | 100 |
| 600 | 70.0 | 100.0 | 8.6 * | 100 |

* Requires Bridging for higher current loads.

The LA surge protector is designed for two pairs of speaker leads plus a connection to ground. The device is rated for a maximum current load of 10 amps which may be divided into two 5 amp pairs or one 10 amp pair of leads. See instructions for bridging connections.

LA Series Surge Protection Features and Installation



LA Series
with PCB1B Base


The LA Series surge protector has a gold plated card edge designed to mount into the PCB1B gold plated female connector. (Note: PCB1B base is sold separately.) The base assembly can be mounted to any stable, flat surface. It should be located close to the protected equipment.

When the LA protection module is inserted in the base the circuits connected to the base are conducted through the protector in a serial manner from the four "Field Side" terminals to the four "Equipment Side" terminals. Either terminals 1 or 10 of the PCB1B base should be attached to an approved ground (using 12 or 10 AWG conductor) in order for the surge protection device to work.

This device is fast acting and effective, employing the best surge protection technology. In cases of extreme exposure to lightning or repeated exposure to induced surges the main surge protection component may need to be replaced. Typically, this device can withstand and protect against 50 occurrences of 2,000 amp surges. When replacement is required, simply unplug the main protection module from the base and replace it with a new one.

Specifications

| | |
|--|-------------------------|
| Peak Surge Current (10 times) 8x20 us | 5kA |
| Life Expectancy 8x20us (2kA) | 50 Occurrences (typ) |
| Response Time | <1ns |
| Resistance | .02 Ohm (typ) |
| Series Inductance | 136 uh per pair |
| Terminal Wire Size | 26 tp 10 AWG |

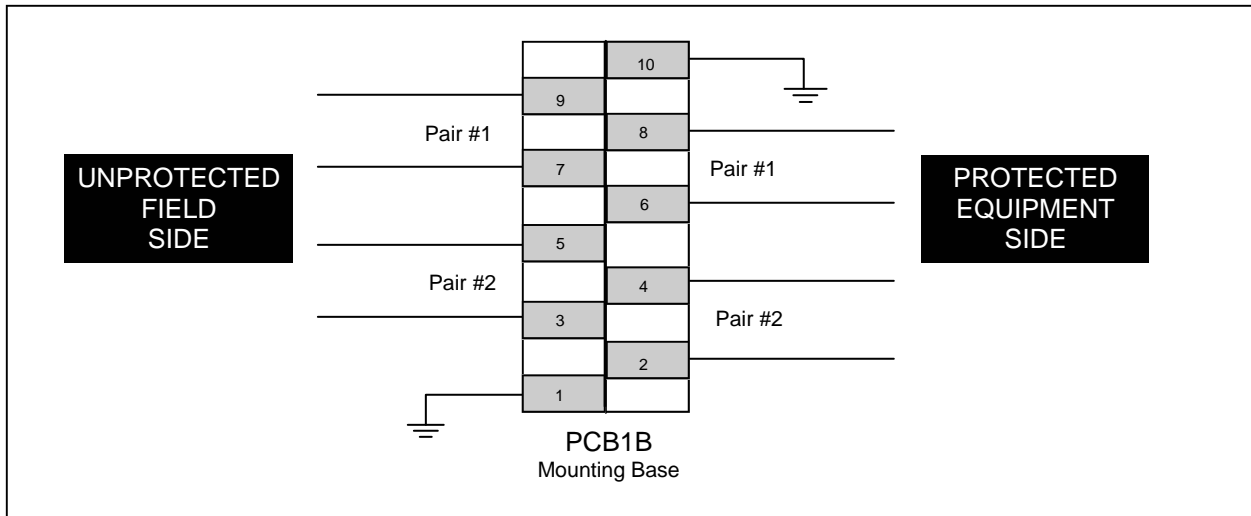

For additional information:
713-772-1404
info@juicegoose.com
www.juicegoose.com