




## CQ Series Remote Contact Closure Connection

Any CQ Series device can be triggered by another CQ, a Juice Goose RC 5 or a latching contact closure. That contact closure can be a simple mechanical switch or a relay card in an AV control platform such as Crestron. That contact must be latching (maintained) and not momentary.

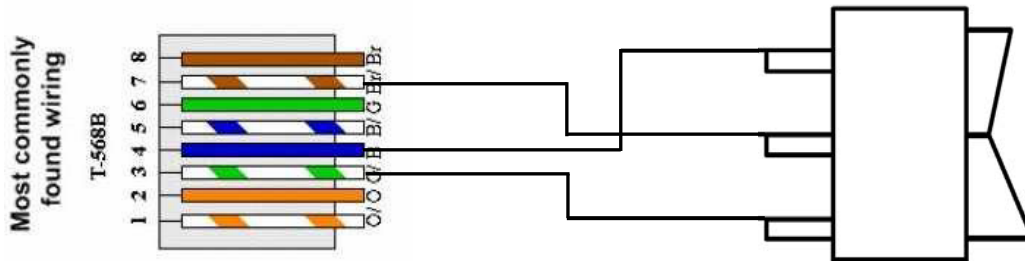

In this illustration, connecting a single pole, double throw (SPDT) switch to the control **Input** line of a CQ Series device will control the sequence up and sequence down activity.

Closing PIN3 to PIN7 will begin a sequence UP. Closing PIN4 to PIN7 will begin a sequence DOWN. Closing both 3 and 4 to 7 will PAUSE the sequence process.

The control switch on the chassis will be inoperative when there is such a contact closure on the input line.

### For additional information or assistance

Juice Goose  
info@juicegoose.com  
713-772-1404